


ALKO Heavy Duty Axle



10,000 Lb. General Duty 99 Spindle

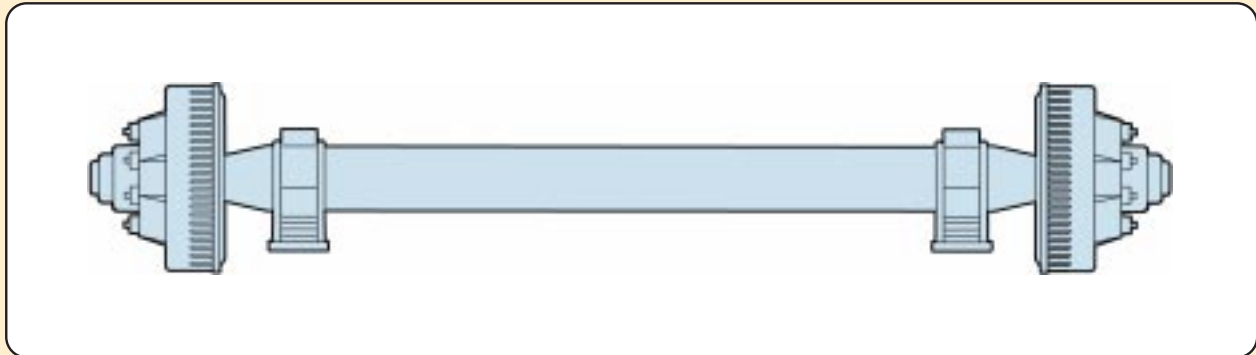

Standard Specifications			
Track*	74.00"	70.00"	66.00"
Hub Face	73.50"	69.50"	65.50"
Spring Center	46.00"	42.00"	38.00"
Over All	95.25"	91.25"	87.25"
Leaf Spring	Five Leaf Slipper at 5000 pounds		
U-Bolt	5/8" - 11 UNC x 9 1/2" (#5912)		
Tie Plate	(#7708)		
U-Bolt Nut	5/8" - 11 UNC - 2B (#6713)		

*Track assumes a wheel disc thickness of 1/4"

- | Features |
|--|
| <ul style="list-style-type: none"> • Axle is constructed of 5" x 1/4" wall tube • Spindle is fully machined from cold forged material, press fit and welded for strength and alignment. • The unicast hub and drum assembly has a replaceable steel armature for use with electric brakes. • AL-KO oil caps are molded from high strength polycarbonate to minimize breakage and leakage. • Timken bearings and races are lubricated with SAE 90 weight oil assuring long bearing life. • Available with 12 1/4" x 3 1/2" self adjusting, hydraulic or electric brakes. • AP kits available for 48 1/4" or 42 1/4" axle spacing. • Rubber bushed equalizer prevents front axle hopping under braking conditions. |



KOBER CORPORATION

21611 Protecta Dr.
Elkhart, IN 46516
219-294-6651
219-294-7267 Fax

301 N. Kennedy
Shawnee, OK 74801
405-273-9315
405-273-1054 Fax

315 Road 911
Baldwyn, MS 38824
662-365-5566
662-365-9222 Fax