


ALKO Heavy Duty Axle



10,000 Lbs. Capacity with 120 Spindle

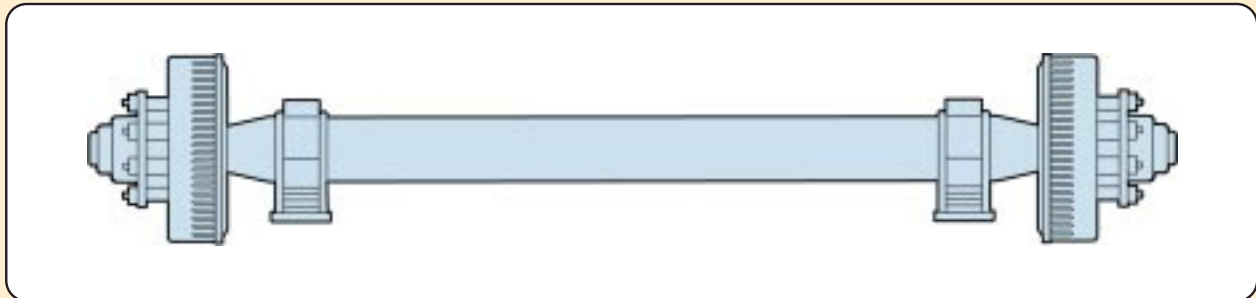

| Standard Specifications | | | |
|-------------------------|----------------------------------|--------|--------|
| Track* | 74.00" | 70.00" | 66.00" |
| Hub Face | 73.50" | 69.50" | 65.50" |
| Spring Center | 46.00" | 42.00" | 38.00" |
| Over All | 95.25" | 91.25" | 87.25" |
| Leaf Spring | Five Leaf Slipper at 5000 pounds | | |
| U-Bolt | 5/8" - 11 UNC x 9 1/2" (#5912) | | |
| Tie Plate | (#7708) | | |
| U-Bolt Nut | 5/8" - 11 UNC - 2B (#6713) | | |

*Track assumes a wheel disc thickness of 1/4"

| Features |
|---|
| <ul style="list-style-type: none">• Axle is constructed of 5" x 1/4" wall tube• Spindle is fully machined from cold forged material, press fit and welded for strength and alignment.• The unicast hub and drum assembly has a replaceable steel armature for use with electric brakes.• AL-KO oil caps are molded from high strength polycarbonate to minimize breakage and leakage.• Timken bearings and races are lubricated with SAE 90 weight oil assuring long bearing life.• Available with 12 1/4" x 3 1/2" self adjusting, hydraulic or electric brakes.• AP kits available for 48 1/4" or 42 1/4" axle spacing.• Rubber bushed equalizer prevents front axle hopping under braking conditions. |

ALKO KOBER CORPORATION

| | | |
|---|---|---|
| 21611 Protecta Dr. Elkhart, IN 46516 219-294-6651 219-294-7267 Fax | 301 N. Kennedy Shawnee, OK 74801 405-273-9315 405-273-1054 Fax | 315 Road 911 Baldwyn, MS 38824 601-365-5566 601-365-9222 Fax |
|---|---|---|