


ALKO Axle Assemblies



5200, 6000 and 7000 Lbs. Capacity

STANDARD AXLE BEAMS

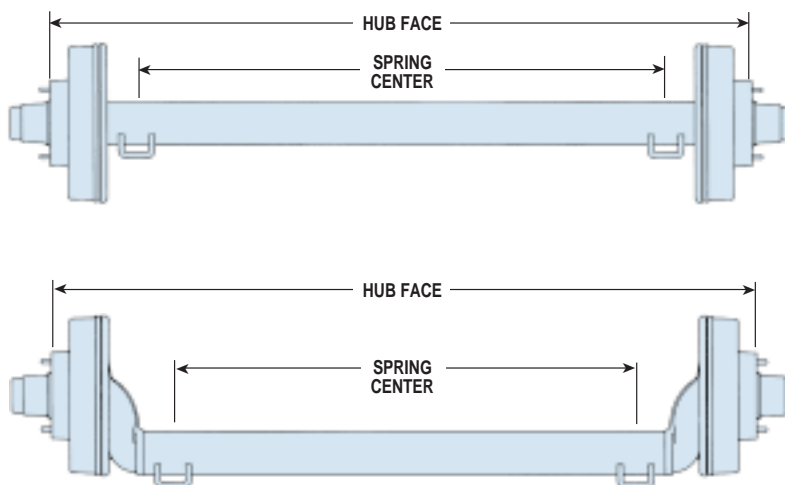

OVERHANG

	Minimum	Maximum
5200 lb. Straight	13"	18"
5200 lb. Drop	17"	20 ¹ / ₂ "
6000 lb. Straight	13 ³ / ₄ "	18"
6000 lb. Drop	17"	20 ¹ / ₂ "
7000 lb. Straight	13 ³ / ₄ "	18"
7000 lb. Drop	17"	20 ¹ / ₂ "

Overhang = hub face minus spring center

A.G. = AL-KO Hub Lubricating System

SPECIFICATIONS

5200/6000 POUND ROUND TUBE AXLE:

3" diameter x .180" nominal wall thickness. Available in straight or 4" drop spindle. 5200 and 6000 pound optional with 1/4" wall thickness.

7000 POUND CAPACITY AXLE:

Standard with 3" diameter tubing, 1/4" wall thickness. Available in straight or 4" drop.

ALKO KOBER CORPORATION

21611 Protecta Dr. Elkhart, IN 46516 219-294-6651 219-294-7267 Fax	301 N. Kennedy Shawnee, OK 74801 405-273-9315 405-273-1054 Fax	315 Road 911 Baldwyn, MS 38824 662-365-5566 662-365-9222 Fax
---	---	---