


10K General Duty Axle Assembly

99 Spindle

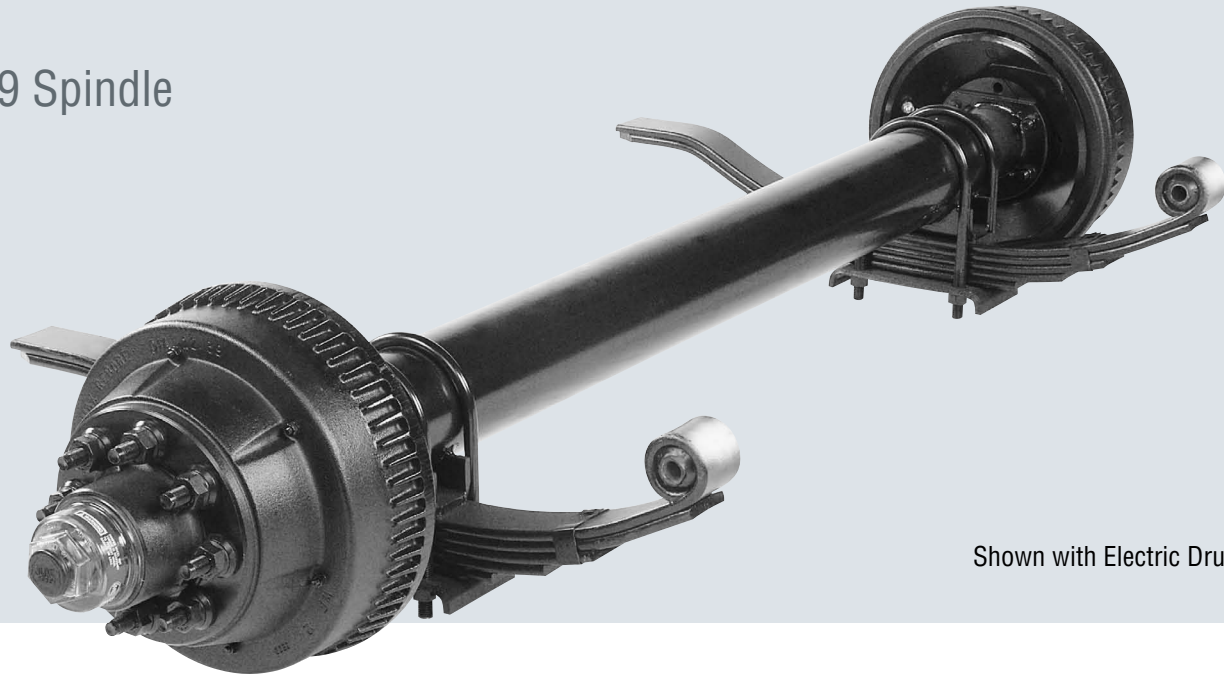

Shown with Electric Drum Brakes

Features

AL-KO's General Duty 10K axle is constructed of 5" x 1/4" wall tubing, but also available in 3 1/2" tubing. 50,000 PSI, 5" x 1/4" wall tubing is swaged and friction welded to the 99 spindle creating a weld which is stronger than the base metal.

The unicast hub and drum assembly has a replaceable steel armature plate for use with electric brakes. AL-KO oil caps are molded from high strength polycarbonate to minimize breakage and leakage. Bearings are lubricated with SAE 90 weight oil to assure long bearing life.

Standard pilot is 4.88 on a 8 on 6.5" bolt circle, using 5/8" swiveling flange nuts. Other hub pilots and wheel fasteners are available upon request.

Standard Specifications

| | | | | | |
|---------------|--------|--------|--------|--------|--------|
| Track❖ | 74.00" | 71.00" | 70.00" | 68.00" | 66.00" |
| Hub Face | 73.50" | 70.50" | 69.50" | 67.50" | 65.50" |
| Spring Center | 46.00" | 43.00" | 42.00" | 40.00" | 38.00" |
| Over All | 95.25" | 92.25" | 91.25" | 89.25" | 87.25" |

❖ Track assumes a wheel disc thickness of 1/4".

| Part Description | AL-KO Part No. |
|---------------------------|----------------|
| Leaf Spring 5LF/5000 lbs. | 8131 |
| U-Bolt 5/8" x 9 1/2" | 5912 |
| Tie Plate | 7708 |
| U-Bolt Nuts 5/8" - 11 | 363851 |

Available Brake Accessories



ELECTRIC
12 1/4" x 3 1/2"



HYDRAULIC
12 1/4" x 3 1/2"