


ST-80 / DR-80 and T-80 / D-80 Axle Assembly

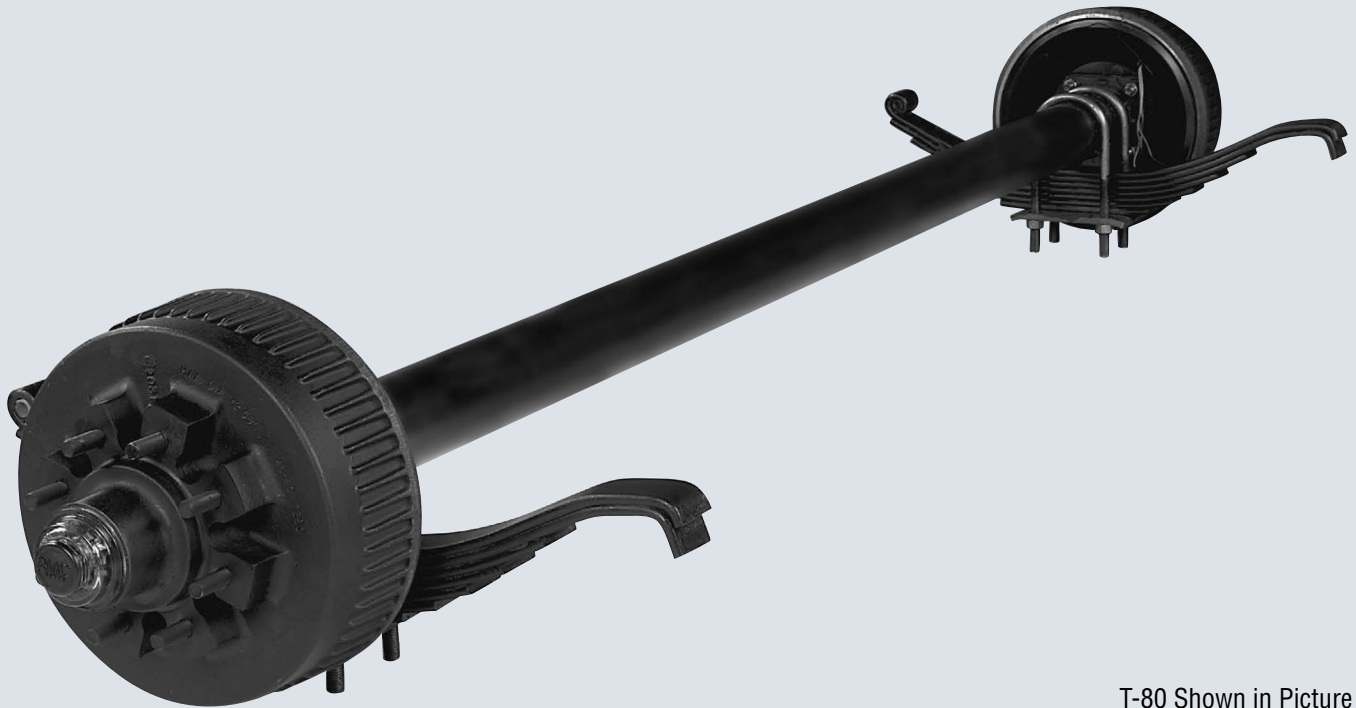

T-80 Shown in Picture


The AL-KO ST-80 and DR-80 axles use a “42” spindle, while utilizing an aggressive 12" x 2" electric brake. The new 12" x 2" Electric brake and drum combination provide excellent stopping power with a more streamlined package, providing the lowest overhang measurements on the market.

The AL-KO T-80 and D-80 axles use a “42” spindle, while utilizing the longstanding 12" x 3 3/8" brake design. The 12" x 3 3/8" Brake is Rear Self Adjusting and is available in an Electric or Hydraulic.

All 8K Leaf Spring axles are made with 3 1/2" x 1/4" wall tubing, making them capable of handling the toughest of jobs without problem. They are available with a straight spindle or the optional 4" drop spindle when needed. Every AL-KO axle is designed, manufactured and tested to meet your specific application.

- Precision machined spindle with inner journal dimension of 1 3/4" and an outer journal dimension of 1 1/4"
- Double lipped spring loaded DuPont coated seals
- Standard 865 bolt patterned hubs, available with 9/16" or 5/8" wheel studs
- Integral cast hubs / drums CNC machined accuracy
- CSA approved 12" electric brake
- Grease lubrication or the optional premium UltruLube System – ST-80 and DR-80
- Standard 90w oil lubrication or available with grease – T-80 and D-80
- 2 year limited warranty on complete axle assembly

Leaf Spring Axles

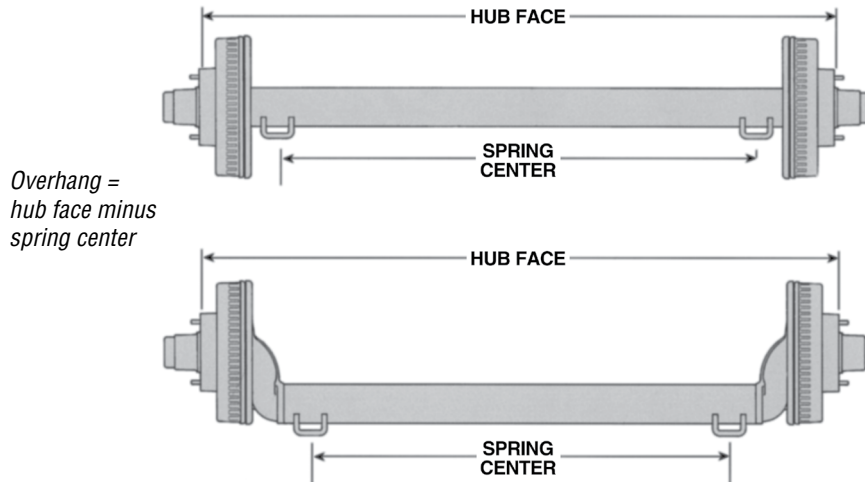

Overhang Chart*

	Tube Size	Minimum	Maximum
ST80	3.5"	17	22
DR80	3.5"	18	23 1/2"
T80	3.5"	17	22
D80	3.5"	18	23 1/2"

*Hub face and spring center measurements are only available in 1/4" increments
Hub face minus spring center equals overhang